



10.24kwh 200AH Lithium Batterie Lifepo4 Rackmount Lithium Battery Energy Storage System

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: XWELL
- Certification: UN38.3, MSDS, UL, CB, BIS, PSE, GB4943.1 safety standard, CE, FCC, ROHS, battery UN38.3, MSDS, UL, CB, BIS, PSE
- Model Number: XW-1024W-1
- Minimum Order Quantity: 1 pcs
- Price: USD
- Packaging Details: Carton
- Delivery Time: 7-10 working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 5000 pcs per month



Product Specification

- Max Continuous Charge Curre: 200A
- Voltage(V): 10.24kwh
- Cell Type: LiFePO4 Prismatic Cell
- Max Charge Current: 200A
- Discharge Cut-off Voltage: 42.5V-51.2V
- Communication Interface: RS485, RS232, CAN
- Highlight: **Energy Storage System Rackmount Lithium Battery**
, 200AH Rackmount Lithium Battery,
10.24kwh Rackmount Lithium Battery

for more products please visit us on esslithiumbattery.com

Product Description

2.56kwh 50AH Lithium Batterie Lifepo4 All In One Home Energy Storage System

Rackmount Lithium Battery Energy Storage System

All-in-one home energy storage systems are self-contained, integrated units that combine battery storage, power conversion, and energy management capabilities into a single, compact solution for residential applications. These systems are designed to provide whole-home backup power and optimize energy usage.


Key Features

Integrated battery packs, inverter/charger, and control system
 Typical storage capacity ranging from 8-20 kWh
 Bidirectional inverter for grid-tied operation and backup power
 Ability to interface with solar PV systems
 Intelligent energy management software and mobile app integration
 Automatic switchover to battery power during grid outages
 Optimization of renewable energy usage and cost savings

Rackmount Lithium Battery Specification

Model	51.2V50Ah	51.2V100Ah	51.2V200Ah
Nominal voltage	51.2V		
Nominal capacity (kwh)	2.56	5.12	10.24
Cell type	LiFePO4		
Standard charge voltage	54.6V(adjustable)		
Max charge current	50A		
Discharge cut-off voltage	42.5V(adjustable)		
Max discharge current	50A		
Display	LCD(Optional)		
Communication interface	CAN/RS485/RS232		
Cycle life	>6000 Cycles (80%DOD)		
Charge temperature range	0~45°C		
Discharge temperature range	-20~60°C		
Color	Black		
Dimension (mm)	442x410x133 3U	442x410x177 4U	550x442x220 5U
Weight	About 35Kg	About 42Kg	About 84Kg
Installation method	Rack Mount		

Cell Specification of Rackmount Lithium Battery




#	Item	Parameter
A	Height	119±1.0 mm
B	Width	160±1.0 mm
C	Thickness	≤50 mm
D	Tabs Distance	97±0.5 mm


Operation Pannel of Rackmount Lithium Battery



Size of Rackmount Lithium Battery

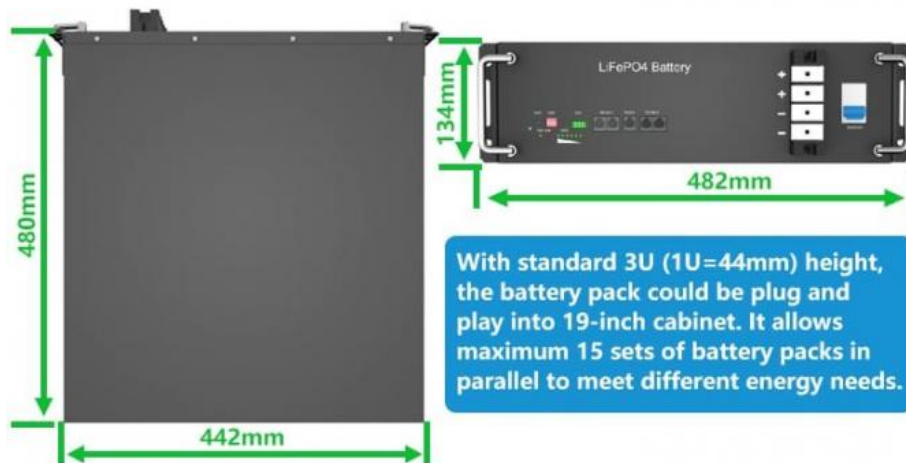

Structure of Rackmount Lithium Battery

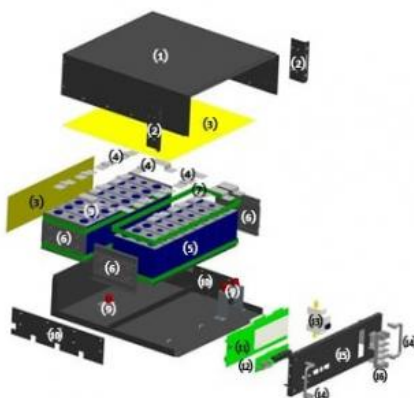

#	Item	Material
(1)	Case Cover	SPCC
(2)	Case Hanger	SPCC
(3)	Insulation Sheet	Ethoxyline
(4)	Bus-Bar	Aluminum Alloy
(5)	Battery Cell	LFP, Aluminum Shell
(6)	Module Side Plate	ABS / PC
(7)	Cell Binding Loop	Plastic Steel
(8)	Case Bottom	SPCC
(9)	Insulating Wiring Terminal	Bakelite
(10)	Side Plate Combination Board	SPCC
(11)	BMS	PCB
(12)	Commination Board	PCB
(13)	DC Switch	/
(14)	Handle	Sherardized SPCC
(15)	Case Front Cover	SPCC
(16)	Terminal Bar (+ & -)	/

Application of Rackmount Lithium Battery

Application Scenario



Data Center



C&I Park



Telecom Base



Medical Equipment

Why choose us?

We production of battery products are widely used in communications, power, financial systems, uninterruptible power supply systems (UPS), power plant and substation switch control, solar panels, controllers inverter etc solar systems, emergency lighting, alarm systems, cars, ships, motorcycles, electric bicycles and other industries. Sales network covers all provinces, municipalities, autonomous regions and established offices in various places and after-sales service center.

Our team with Yuasa ,BYD battery senior consultant,High quality technical management team, advanced production and testing equipment to ensure the quality of the battery is reliable.



XWELL GUANGDONG XWELL TECHNOLOGY CO., LTD.



+86 18620492985



sales@esslithiumbattery.com



esslithiumbattery.com

Room 322, Building 3, No. 801, Qiaoxing Avenue, Xiaoluo Village, Shatou Street, Panyu District, Guangzhou, China